

RP-ISO-hermetic 65

The System


- Proven
- Undiminished stability even with very large components

Steel

- High load capacity
- Long lasting and secure
- Stable and resistant to impact
- Hinges maintain fixed position
- Environmentally friendly

Architecture

- Flush fitting
- Aesthetic
- Repitition
- Highly functional insert after aesthetic
- Large expanses of natural light
- Glazing thickness from 18 to 51mm

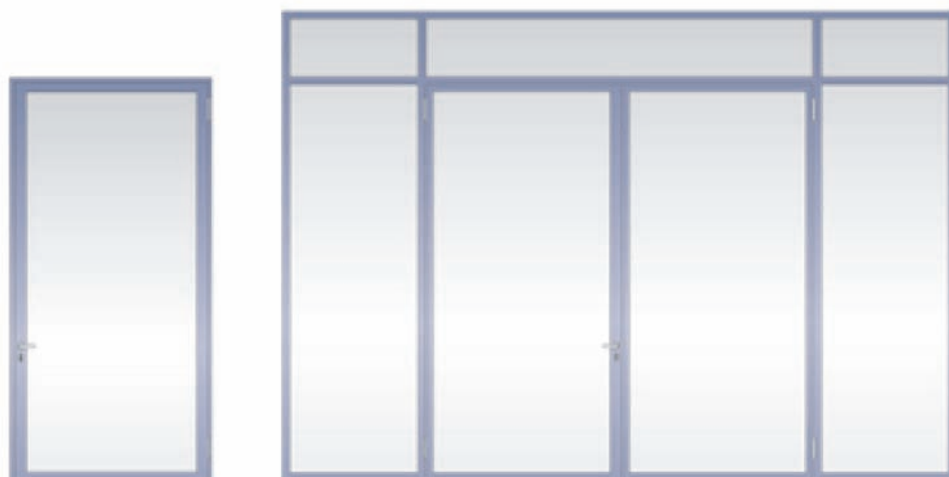

Steel makes it stable

Processing

- simple and economical
- screens with high stability
- prefabrication possible on demand
- user friendly material thickness 1.8mm
- glazing beads as push-in, screw or clip version
- dry and wet glazing possible
- powder coating up to 200°C
- use of neutral looks possible with lock adapter



Other Door Systems

- RP-ISO-GARANT, stainless steel
- RP-ISO-PURAL, aluminium
- RP-ISO-hermetic T30 fire protection
- RP hermetic 40, 50 and 50CS smoke protection




RP-ISO-hermetic 65

Profiles for clip-on glazing beads



Profiles for push-in glazing beads

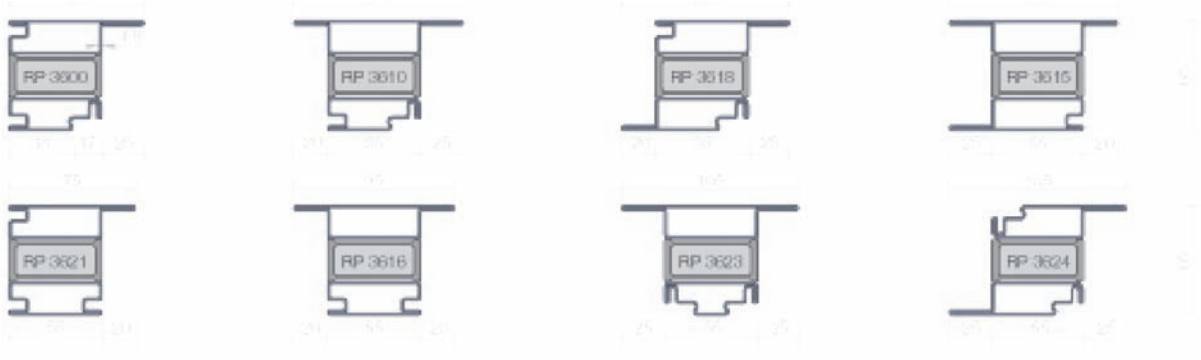

glazing beads, steel




studs



glazing beads, steel



glazing beads, aluminium

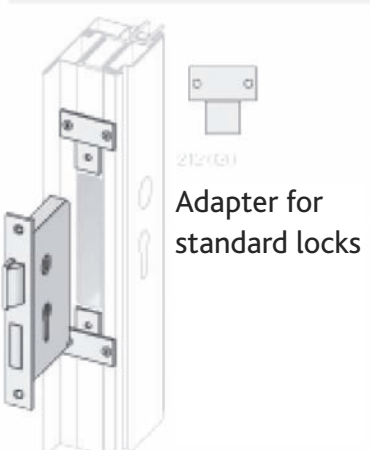

glazing seals



rebate door seal



automatic floor seal



for further information see manual, test reports and assessments

