

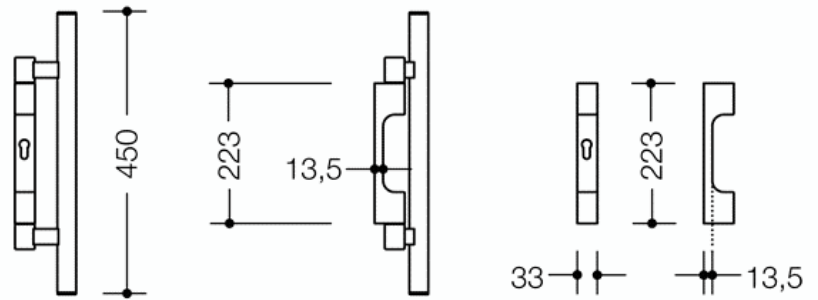


Activated Pull Handle for Fire-Rated Rebated Door

Activated Pull Handle for Fire Rated Rebated Door

- **Stainless steel** handle with 33mm diam., lower plate section of metal with polyamide caps, plate thickness in lock cylinder area 13,5mm.
- Supplied with screws and 9mm square spindle.
- Tested according to DIN 18273 for **fire protection doors** and to 1 million + locking cycles.
- To be used on **Presto and Fuego** doors only.

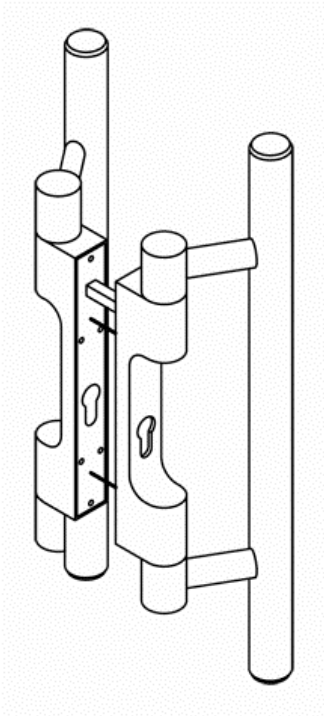

- For 92mm lock set.
- **Operation:** in the direction of door opening – push, pull in the opposite direction.
- **Function:** Press down horizontally or pull the handle respectively – depending on the opening direction of the door – to open the latch. After operation, the handle springs back into the starting position so that it required only a minimum of mobility and co-ordination.

