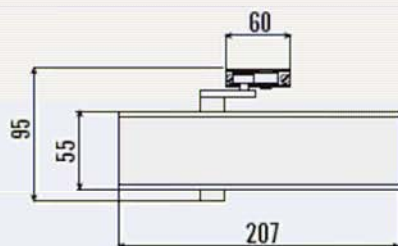


Door closer with standard arm

Product-No.: 1F 71 00



Dimensions



Gradually adjustable closing force,
size 2/3/5 acc. EN 1154 A.

Features

- Infinitely adjustable closing speed.
- Gradually adjustable closing force.
- Adjustable latch.
- Suitable for left and right hand doors.
- Max. width of door leaf: 1250 mm.

The different closing force can be achieved by different door closer installation position on the door leaf. A mounting plate for the installation of the size 2/3/4 and 3/4/5 acc. to EN 1154A, as well as the installation acc. to EN 1154, insert I is available as an accessory.

Specification text: please refer to page 115.









Applications

- For light and heavy interior doors.
 - For light and heavy exterior doors.
- 54 ■ For fire- and smoke protection doors up to 1250 mm. **F**



ECO at Ford-Research Centre, Aachen



Specification Type	Doors						Possibility of adjustment				Color					
	Size acc. EN	Interior doors		Exterior doors		Fire- & smoke protection doors		latch	Closing speed	Back-check	Delayed action	Silver RAL 9006	White RAL 9016	Brown RAL 8014	Satin or polished stainless steel	Others on request
		light	heavy	light	heavy	up to 1250 mm	up to 1400 mm									
 TS-42 V4A-Door closer	6 - 7/ 6 - 8		✓		✓			X	X						X	◆
 Acc. EN 1154 A F TS-41	1 - 6	✓	✓	✓	✓		✓	X	X	X	◆	X	X	X	X	◆
 Acc. EN 1154 A F TS-40	2 - 5	✓	✓	✓	✓	✓		X	X			X	X	X		◆
 TS-21	2/3/ 4/5	✓	✓	✓				X	X			X	X	X		◆
 TS-11	1/2/ 3/4/5	✓	✓	✓				X	X			X	X	X		◆
 Acc. EN 1154 A F TS-11F	2/3/5	✓	✓	✓	✓	✓		X	X			X	X	X		◆
 TS-10	2/3/4	✓	✓	✓				X	X			X	X	X		
 TS-10D	2/3/4	✓	✓	✓				X	X			X	X	X		

