

Touch Bars / Panic bars EN 179 And EN 1125 Explained


DIN-standards for emergency exits and panic doors.
 DIN EN 179: Emergency exit devices with handle or push-plate

Application area:

For application in buildings, in which the emerging of a panic situation is rather improbable. The persons in these buildings should be familiar with the emergency exits and the fittings. Precise examples are not mentioned in the DIN EN 179

Actuation:

by handle or push-plate

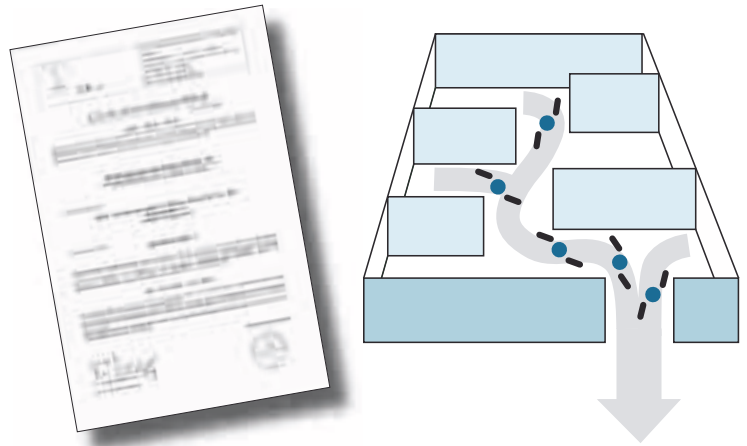

DIN EN 1125: Panic devices with horizontal push-bar for emergency exit doors.





Application area:

For application in buildings, in which the emerging of a panic situation is probable. There must be a safe escape opportunity - also without knowing the fittings - by initial load (pressure). Possible application areas can be cinemas, concert halls, public authorities and so on.

Actuation:

by horizontal panic push-bar or panic-bar

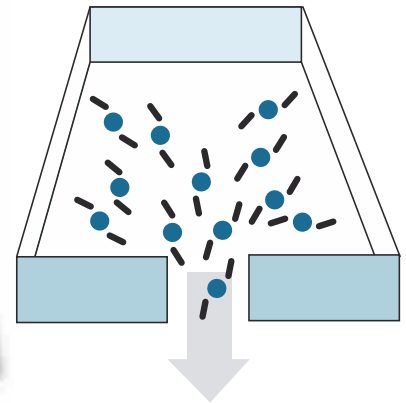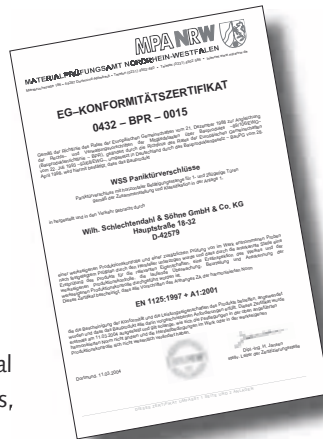

Please notice:

Lock and fittings have always to be proven and certified together. The accomodation to several profile systems can only be done by the fitting manufacturer.